

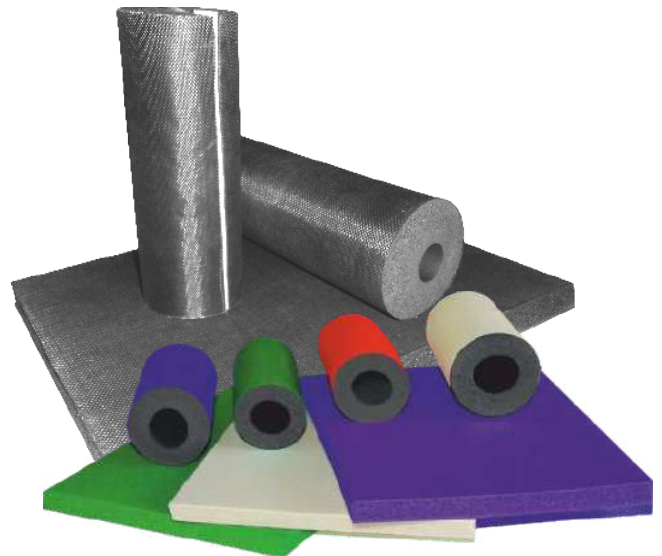
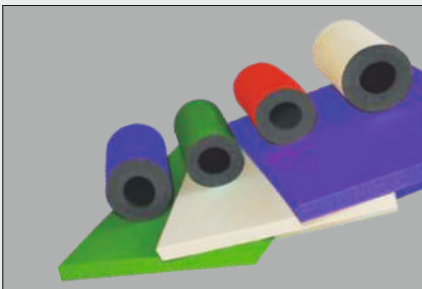


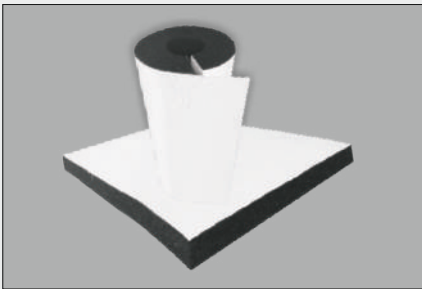

# AEROCCELL

WITH GLASS CLOTH

NOW AVAILABLE IN 5 COLORS

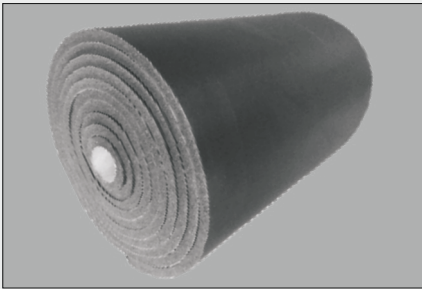

## ADVANTAGES

- Suitable for harsh conditions
- Reinforced with glass fiber covering
- Resistance against mechanical impact/scratch
- Easy to install without special tools

# AEROCELL WITH GLASS CLOTH

## SPECIFICATIONS AEROCELL - GC

Technical Performance	
Density	50 Kg/M <sup>3</sup> ± 20%
Material Lamination	Laminated on one side with Glass Cloth
Temperature Range *	-40°C to + 105°C
Thermal Conductivity W/m.K ASTM-C-518	$\leq 0.035$ W/m <sup>2</sup> K @ 10°C $\leq 0.036$ W/m <sup>2</sup> K @ 20°C $\leq 0.037$ W/m <sup>2</sup> K @ 30°C $\leq 0.038$ W/m <sup>2</sup> K @ 40°C
Water vapour diffusion Resistance factor $\mu$	$\geq 11,000$
Ecological Data	No asbestos, No HCFC - CFC, No Formaldehyde - Cd-Hg etc.
Cell Structure	Closed Cell
Ozone resistance	Very Good
Odour	Negligible
Reaction to Fire a) Fire Performance acc. To building regulation b) Surface flame spread c) Fire Propagation d) Rate of Burning (Vertical position) e) Practical fire Behaviour	Class 0 - BS 476 Part 6&7 Class 1 - BS 476 Part 7:1997 I<12 and i1<6 BS 476 Part 6:1989 Class V-0 UL 94:1997 Self-Extinguishing, does not drip and does not spread flames, ASTM D 635-06
FM Approved	FM Approved

\* For temperature below -40C pls consult our engineering group

Packing Details For Aerocell - GC Continues Tubes											
Size-ID		9mmThk		13mmThk		19mmThk		25mmThk		32mmThk	
mm	inch	Pcs./ Crtn	Mtr./ Crtn	Pcs./ Crtn	Mtr./ Crtn	Pcs./ Crtn	Mtr./ Crtn	Pcs./ Crtn	Mtr./ Crtn	Pcs./ Crtn	Mtr./ Crtn
10	3/8							20	40		
13	1/2							20	40		
16	5/8					30	60	20	40		
19	3/4	72	144	56	112	30	60	20	40	20	40
22	7/8	60	120	42	84	24	48	18	36	18	36
25	1	50	100	42	84	20	40	16	32	16	32
28	1 1/8	50	100	36	72	20	40	16	32	16	32
32	1 1/4	42	84	30	60	20	40	15	30	12	24
35	1 3/8	36	72	30	60	16	32	12	24	12	24
38	1 1/2	30	60	25	50	16	32	12	24	10	20
42	1 5/8	30	60	25	50	16	32	12	24	10	20
45	1 3/4	28	56	20	40	15	30	12	24		
48	1 7/8	28	56	20	40	15	30	10	20	9	18
51	2	24	48	20	40	12	24	9	18	9	18
54	2 1/8	20	40	18	36	12	24	9	18	6	12
60	2 3/8	20	40	15	30	10	20	9	18	6	12
67	2 5/8	18	36	13	26	9	18	8	16	6	12
73	2 7/8	18	36	13	26	9	18	8	16	6	12
76	3	18	36	12	24	8	16	8	16	5	10
79	3 1/8	15	30	12	24	8	16	6	12	5	10
89	3 1/2	10	20	12	24	6	12	6	12	5	10

Length: 2000 ± 20mm. Thickness from 6mm to 19mm ± 1mm and for 25mm & 32mm ± 2mm.

Tolerance (ID): from 6mm to 42mm +2/-0mm, 42mm to 73mm +3/-0mm and above 73mm + 6mm/-0mm.

Tolerance for width of the sheet i.e 1000 ± 20mm

**Note:** Special sizes available on request.

Tubes can also be available ID - 127mm, 130mm, 140mm, 165mm size as per customer requirement.

## PACKING DETAILS FOR AEROCELL - GC CONTINUOUS SHEETS

Sheet Thickness * (mm)	Dimensions	Roll Content sq. mtr.	Sheet Thickness (mm)	Dimensions	Roll Content sq. mtr.
6	1 x 40m	40	19	1m x 15m	15
9	1 x 30m	30	25	1m x 10m	10
13	1 x 25m	25	32	1m x 8m	8
16	1 x 20m	20			

\* 3mm sheet is available with one side skin only | \* Tolerance for thickness from 6mm to 19mm ±1mm & for 25mm & 32 mm ±2mm

\* Available in various lamination such as Aluminum Foil, Glass Cloth, Self Adhesive

\* Tolerance for width of the sheet: 1000 ± 20mm.

## CERTIFICATIONS



Manufactured and Marketed by:  
**ALP AEROFLEX INDIA PVT. LTD.**

**Corporate Office:** Plot No. 32, Sector-18 (HUDA), Gurgaon, Haryana-122015 (India)  
 Tel.: +91-124-4731500 | E-mail: marketing@alpaeroflex.com |  
 Website: www.alpaeroflex.com



#SWADESHI



**Plant:** Bilaspur Road, Opp. Govt. P.G. College, Rudrapur, Distt.: Udham Singh Nagar, Uttarakhand- 263153  
**Telephone:** +91-5944-247869, 247870 | **Fax:** +91-5944-243813

Disclaimer: Although these values represent actual results achieved in tests, they should only be used as a guide. ALP Aeroflex cannot guarantee the performance of the product as all situations are different & should be treated separately. All statements & Technical informations are based on results obtained under typical conditions. It is the responsibility of the recipient to verify with us that the informations are appropriate for specific use intended by the recipient.